


LOCKING DEVICES




Locking Devices are to be used with all grating systems where wheel traffic occurs. This is necessary to provide system integrity.

CHANNEL ADAPTERS

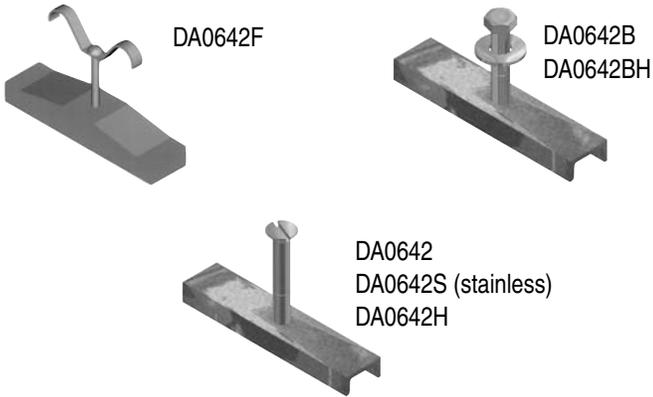


Male and Female Transition Devices (699F & 699M) are available where channel runs are in opposite directions and two channels are set either female to female or male to male. A female transition piece (699F) is used to fill the top space of the female to female joint (this applies to 600 Series only). An epoxy grout or urethane sealer can be used to smooth over the gap on the inside bottom of the channel. A male transition piece (699M) is used to lap under the male to male joint.

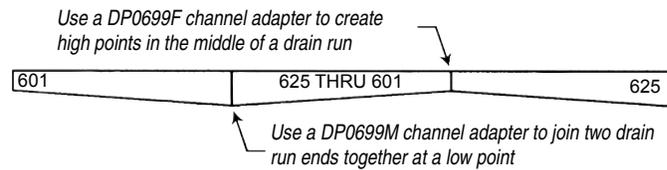

END CAPS

POLYCAST® end caps are used to enclose or provide piping transitions to the female and male ends of the channels where catch basins are not being used. They fit all channels ending in five (5), zero (0), neutrals (N) and halves (H).

ABS Plastic End Caps

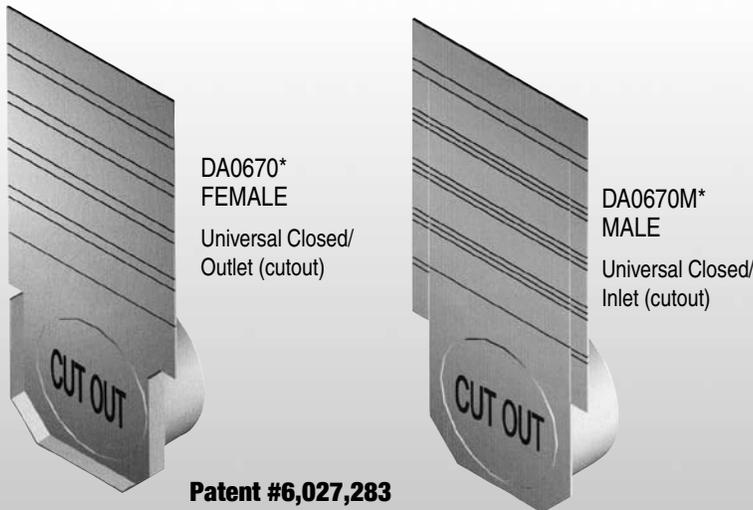

Patent #6,027,283

Male End Caps

POLYCAST® Universal male end caps are used to enclose or provide 4" pipe inlets to the female channel ends. Inlets accommodate 4" pipes.

Female End Caps

POLYCAST® Universal female end caps are used to enclose or provide 4" pipe inlets to the male channel ends. Inlets accommodate 4" pipes.

*Fits ALL POLYCAST® (600, 700 & 900 Series) Channels

Polymer Concrete End Caps



**
DA0620D6 (DA0720D6)
DA0625D6 (DA0725D6)

DA0625DM6**
(DA0725DM6)

These inlets and outlets accommodate 6" pipes.

** Fits CORRESPONDING POLYCAST® 600, 700 & 900 Series Channels